| REVISIONS | | | |
|---|---|---|---|
| LTR | DESCRIPTION | DATE | APPROVED |

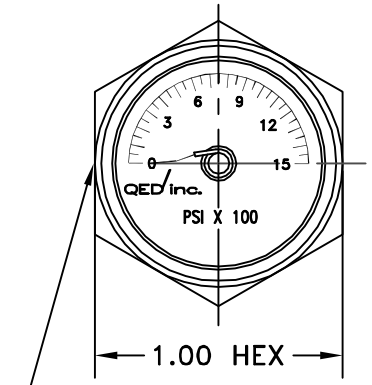


PRESSURE RELIEF DEVICE
.062 DIA HOLE COVERED WITH
PRESSURE SENSITIVE TAPE
(ORIENTATION OPTIONAL)

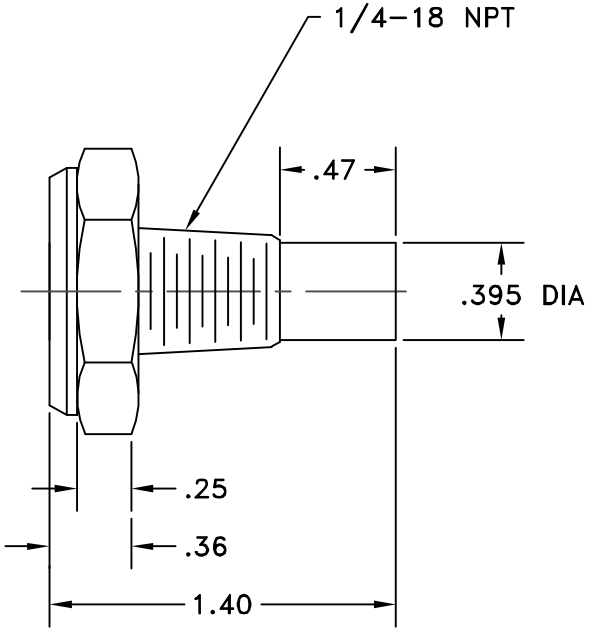


## SPECIFICATIONS

1. RANGE: 0 – 1500 PSI
2. ACCURACY: ±10 PSI AT 750 PSI
   ±25 PSI AT 600 PSI & 900 PSI
   ±50 PSI AT BALANCE OF SCALE
3. PROOF PRESSURE: 2000 PSI
4. WEIGHT: 1.7 OZ(MAX)
5. OPERATING TEMPERATURE RANGE: –65°F TO 212°F
6. GAUGE SHALL MEET PERFORMANCE REQ. OF MIL–G–25867
7. GAUGE SHALL BE WATER RESISTANCE

## MATERIALS

1. CASE: 303 STAINLESS STEEL
2. CRYSTAL: TEMPERED GLASS
3. BOURDON COIL: INCONEL X–750
4. DIAL: ALUMINUM ALLOY, CLEAR ANODIZED
   BLACK CHARACTERS, WHITE BACKGROUND

THIS DOCUMENT IS THE PROPERTY OF QED/INC. AND IS CONVEYED WITH THE EXPRESS CONDITION THAT IT AND THE INFORMATION CONTAINED IN IT ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF QED/INC., AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT. THIS DOCUMENT MAY CONTAIN INFORMATION SUBJECT TO THE ITAR OR THE EAR. THIS INFORMATION MAY NOT BE EXPORTED, RELEASED, OR DISCLOSED TO FOREIGN NATIONALS OR NON–U.S. PERSONS WITHOUT FIRST COMPLYING WITH THE EXPORT RQUIREMENTS OF THE ITAR AND EAR.

| ITEM | QTY | DESCRIPTION | IDENT | PART NUMBER | REMARKS |
|---|---|---|---|---|---|

LIST OF MATERIALS

| NEXT ASSY | USED ON |
|---|---|
| | |
| | |
| | |

APPLICATION

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
DECIMALS FRACTIONS
.X ± ±
.XX ± .03 ANGLES
.XXX± .010 ±

MATL:

FINISH

| SIGNATURES | DATE |
|---|---|
| BY | 2/01 |
| CKD | |
| ENGR | |
| APPD | |

QED/inc. 2920 SOUTH HALLADAY STREET SANTA ANA, CALIFORNIA 92705

TITLE
PRESSURE GAUGE

| SIZE | CODE IDENT NO. | DWG NO. |
|---|---|---|
| B | 24708 | 1000 SERIES TYPE BF2 |

SCALE 2=1 WT. SHEET 1 OF 1

PDF created with FinePrint pdfFactory trial version www.pdffactory.com