REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

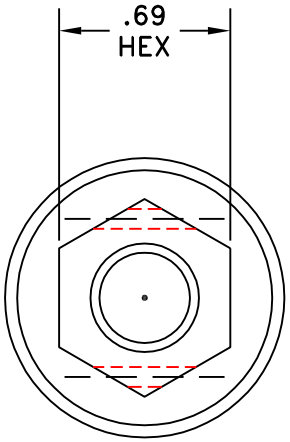

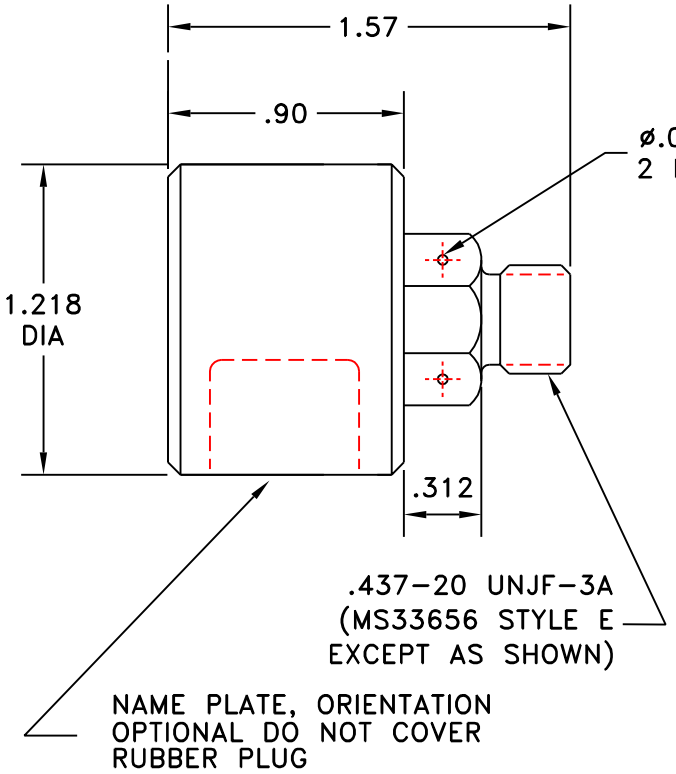

FLUSH BUTYL RUBBER PLUG
(PRESSURE RELIEF DEVICE)

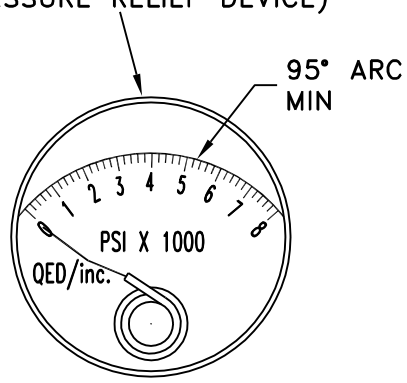

SPECIFICATIONS

1. PRESSURE RANGE: 0 – 8000 PSI
2. ACCURACY: ±250 PSI FROM −65°F TO +250°F
3. PROOF PRESSURE: 10,800 PSI
4. ROTATIONAL MOVEMENT OF SIGHT GLASS WITHIN GAUGE BODY IS ACCEPTABLE, AXIAL AND LATERAL MOVEMENT IS NOT ACCEPTABLE.
5. BOURDON TUBE IS DAMPENED WITH SILICONE GEL

MATERIALS

1. CASE: ALUMINUM ALLOY, BLACK ANODIZED
2. FITTING: 303 ST. STEEL
3. BOURDON TUBE: INCONEL X-750
5. CRYSTAL: TEMPERED GLASS
6. DIAL: ALUMINUM ALLOY, BLACK ANODIZED
7. COIL SUPPORT POST: TEFLON
8. PRESSURE RELIEF DEVICE: BUTYL RUBBER

The information disclosed herein was orginated by and is the property QED/inc. and except for rights expressly granted to the United States Government, QED/inc. reserves all patent, proprietary, design, use, sales, manufacturing and reproduction rights thereto.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		SIGNATURES	DATE
DECIMALS	FRACTIONS	BY	2/01
.X ±.015	± 1/16	CKD	
.XX ±.03	ANGLES	ENGR	
.XXX±.010	± 1°	APPD	
MATL:			
FINISH			

NEXT ASSY	USED ON
APPLICATION	

QED/inc. 2920 SOUTH HALLADAY STREET SANTA ANA, CALIFORNIA 92705

TITLE: PRESSURE GAUGE

SIZE	CODE IDENT NO.	DWG NO.
B	24708	1218 SERIES TYPE BF5

SCALE	2=1	WT.	SHEET 1 OF 1

PDF created with FinePrint pdfFactory trial version www.pdffactory.com